

Company:

Your reference:

Your order no.:

Page:

of


Requested del date:

Window Specification (Please tick required fields)

Sprayed:	Finish:	Continuous Horns:	Spacer Bar:	Furniture Colour:	Limit Stops:	Fixing Lugs:
Internal	PVC-U White	Yes	White	Gold	Yes	Yes
External	White Foil	No	Black	Chrome	No	No
(Foiled windows only)	Cream Foil		Grey	White		
Colour:	Build Method:	Bottom Rail:		Woolpile:		
	Timberweld [®]	105mm Deep		Bronze	Grey	
	Mitred Option	63mm Large		Satin Silver	White*	

Timberweld[®] / Mechanical Joints to all corners as standard, Mitred Joints optional

Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes

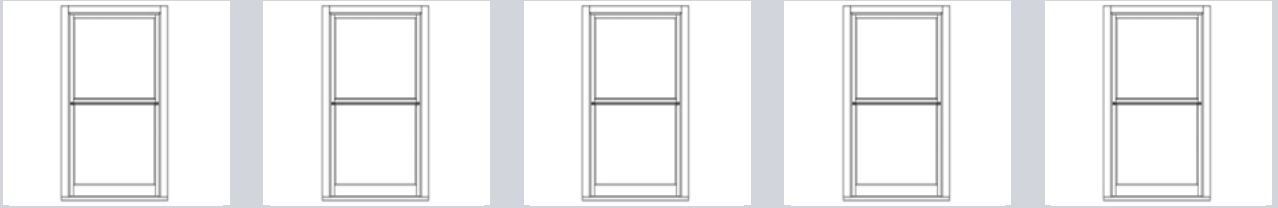

Quantity

Location

Manufacture Width

Manufacture Height

Transom Drop

Trickle Vent Placement

EA Requirement

Projecting Cill

Egress Compliance

No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer				
mm ²				mm ²				mm ²				mm ²											
No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
No	Yes				No	Yes				No	Yes				No	Yes							

Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes



Quantity

Location

Manufacture Width

Manufacture Height

Transom Drop

Trickle Vent Placement

EA Requirement

Projecting Cill

Egress Compliance

No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer				
mm ²				mm ²				mm ²				mm ²											
No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
No	Yes				No	Yes				No	Yes				No	Yes							

Additional Notes:

Dear Customer, the performance requirements to comply with the building regulations are effective from 15th June 2022. These new changes include higher thermal performance, and increased ventilation provision where technically feasible. Please carefully check the specification of your order / enquiry to ensure this meets your needs. Where it is not technically feasible to comply fully with AD F, where requested we will include the maximum possible to comply with this clause of the regulation. *In addition, Masterframe will not be held liable for White Woolpile becoming dirty or discoloured during installation or operation. **Please enter your name to confirm acceptance** ←

Authentic: 147mm outerframe, Chamfered 'putty line' external and Ovolo 'sculptured' internal, tilt rests applied up to 35kg sash weight, Deep Bottom Rail, 4/16/4 Low 'E' & Low Iron glazing, Georgian where requested will be plant-on bar. Energy BFRG "A" rated and CE mark compliant as standard. PAS24/SBD BS7950 as standard. Furnished window frames over 916mm wide and/or with a central vertical Georgian bar will be fitted with 2 cam catches and keeps for security and balance. All sizes to be overall manufacture sizes and include cills and packers.
All windows viewed externally.

Company:

Your reference:

Your order no.:

Page:

of

Requested del date:

Window Specification (Please tick required fields)

Sprayed:	Finish:	Continuous Horns:	Spacer Bar:	Furniture Colour:	Limit Stops:	Fixing Lugs:
Internal	PVC-U White	Yes	White	Gold	Yes	Yes
External	White Foil	No	Black	Chrome	No	No
(Foiled windows only)	Cream Foil		Grey	White		
Colour:	Build Method:	Bottom Rail:		Woolpile:		
	Timberweld®	105mm Deep		Bronze	Grey	
	Mitred Option	63mm Large		Satin Silver	White*	

Timberweld® / Mechanical Joints to all corners as standard, Mitred Joints optional


Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes



Quantity
Location
Manufacture Width
Manufacture Height
Transom Drop

Trickle Vent Placement	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer				
EA Requirement	mm ²				mm ²				mm ²				mm ²											
Projecting Cill	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
Egress Compliance	No	Yes			No	Yes			No	Yes			No	Yes										

Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes

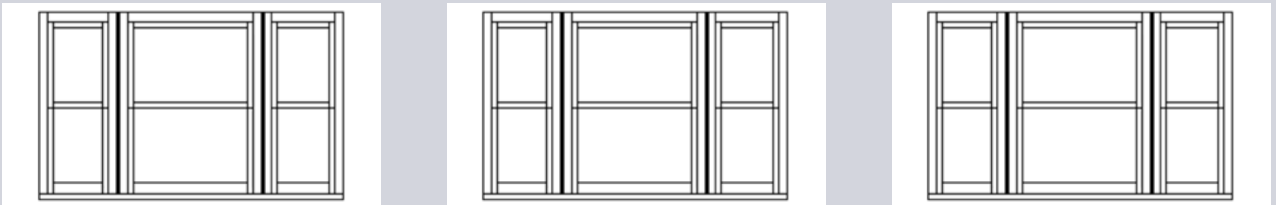

Quantity
Location
Manufacture Width
Manufacture Height
Transom Drop

Trickle Vent Placement	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer						
EA Requirement	mm ²				mm ²				mm ²									
Projecting Cill	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
Egress Compliance	No	Yes			No	Yes			No	Yes								

Additional Notes:

Dear Customer, the performance requirements to comply with the building regulations are effective from 15th June 2022. These new changes include higher thermal performance, and increased ventilation provision where technically feasible. Please carefully check the specification of your order / enquiry to ensure this meets your needs. Where it is not technically feasible to comply fully with AD F, where requested we will include the maximum possible to comply with this clause of the regulation. *In addition, Masterframe will not be held liable for White Woolpile becoming dirty or discoloured during installation or operation. **Please enter your name to confirm acceptance**

Authentic: 147mm outerframe, Chamfered 'putty line' external and Ovolo 'sculptured' internal, tilt rests applied up to 35kg sash weight, Deep Bottom Rail, 4/16/4 Low 'E' & Low Iron glazing, Georgian where requested will be plant-on bar. Energy BFRc "A" rated and CE mark compliant as standard. PAS24/SBD BS7950 as standard. Furnished window frames over 916mm wide and/or with a central vertical Georgian bar will be fitted with 2 cam catches and keeps for security and balance. All sizes to be overall manufacture sizes and include cills and packers.
All windows viewed externally.