

Company:

Your reference:

Your order no.:

Page:


of

Requested del date:

Window Specification (Please tick required fields)

Sprayed:	Finish:	Continuous Horns:	Internal Staff Bead:	Furniture Colour:	Limit Stops:	Fixing Lugs:
Internal	PVC-U White	Yes	Yes	Champagne Gold	Yes	Yes
External	White Foil	No	No	Chrome	No	No
(Foiled windows only)	Cream Foil		Spacer Bar:	Polished Bronze	Woolpile:	
Colour:	Build Method:	Bottom Rail:	White	Satin Chrome	Grey	White*
	Timberweld®	105mm Deep	Black			
	Mitred Option	63mm Large	Grey			
Timberweld® / Mechanical Joints to all corners as standard, Mitred Joints optional						

Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes

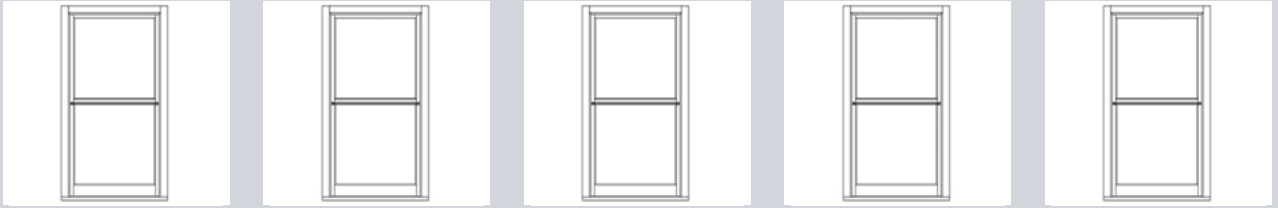

Quantity
Location
Manufacture Width
Manufacture Height
Transom Drop

Trickle Vent Placement	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer				
EA Requirement	mm ²				mm ²				mm ²				mm ²											
Projecting Cill	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
Egress Compliance	No	Yes			No	Yes			No	Yes			No	Yes			No	Yes						

Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes



Quantity
Location
Manufacture Width
Manufacture Height
Transom Drop

Trickle Vent Placement	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer				
EA Requirement	mm ²				mm ²				mm ²				mm ²											
Projecting Cill	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
Egress Compliance	No	Yes			No	Yes			No	Yes			No	Yes			No	Yes						

Additional Notes:

Dear Customer, the performance requirements to comply with the building regulations are effective from 15th June 2022. These new changes include higher thermal performance, and increased ventilation provision where technically feasible. Please carefully check the specification of your order / enquiry to ensure this meets your needs. Where it is not technically feasible to comply fully with AD F, where requested we will include the maximum possible to comply with this clause of the regulation. *In addition, Masterframe will not be held liable for White Woolpile becoming dirty or discoloured during installation or operation. **Please enter your name to confirm acceptance**



Heritage: Exclusive Staff Bead 133mm Frame, Chamfered 'putty line' external and Ovolo 'sculptured' internal, tilt rests applied up to 35kg sash weight, Deep Bottom Rail, 4/16/4 Low 'E' & Low Iron glazing, Georgian where requested will be plant-on bar. Energy BFRc "A" rated and CE mark compliant as standard. Furnished window frames over 926mm wide and/or with a central vertical Georgian bar will be fitted with 2 cam catches and keeps for security and balance. PAS24/SBD BS7950 as standard. All sizes to be overall manufacture sizes and include cills and packers.
All windows viewed externally.

Company:

Your reference:

Your order no.:

Page:

of

Requested del date:

Window Specification (Please tick required fields)

Sprayed:	Finish:	Continuous Horns:	Internal Staff Bead:	Furniture Colour:	Limit Stops:	Fixing Lugs:
Internal	PVC-U White	Yes	Yes	Champagne Gold	Yes	Yes
External	White Foil	No	No	Chrome	No	No
(Foiled windows only)	Cream Foil			Polished Bronze		
Colour:	Build Method:	Bottom Rail:	Spacer Bar:	Satin Chrome	Woolpile:	
	Timberweld®	105mm Deep	White		Grey	
	Mitred Option	63mm Large	Black		White*	
			Grey			


Timberweld® / Mechanical Joints to all corners as standard, Mitred Joints optional

Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes



Quantity																														
Location																														
Manufacture Width																														
Manufacture Height																														
Transom Drop																														
Trickle Vent Placement	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer										
EA Requirement	mm²				mm²				mm²				mm²				mm²													
Projecting Cill	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
Egress Compliance	No	Yes			No	Yes			No	Yes			No	Yes			No	Yes												

Please identify any Georgian designs, toughened glass, laminated glass, obscured glass (providing pattern) & fixed sashes

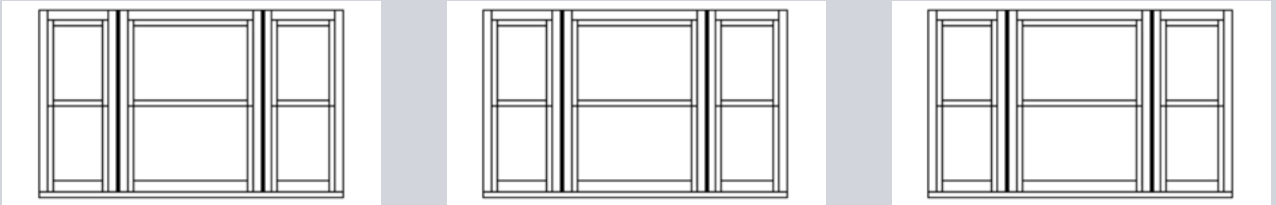

Quantity																		
Location																		
Manufacture Width																		
Manufacture Height																		
Transom Drop																		
Trickle Vent Placement	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer	No	Frame	Sash	Frame & Concealer		
EA Requirement	mm²				mm²				mm²				mm²					
Projecting Cill	No	85	120	150	180	225	No	85	120	150	180	225	No	85	120	150	180	225
Egress Compliance	No	Yes			No	Yes			No	Yes			No	Yes				

Additional Notes:

Dear Customer, the performance requirements to comply with the building regulations are effective from 15th June 2022. These new changes include higher thermal performance, and increased ventilation provision where technically feasible. Please carefully check the specification of your order / enquiry to ensure this meets your needs. Where it is not technically feasible to comply fully with AD F, where requested we will include the maximum possible to comply with this clause of the regulation. *In addition, Masterframe will not be held liable for White Woolpile becoming dirty or discoloured during installation or operation. **Please enter your name to confirm acceptance**

Heritage: Exclusive Staff Bead 133mm Frame, Chamfered 'putty line' external and Ovolo 'sculptured' internal, tilt rests applied up to 35kg sash weight, Deep Bottom Rail, 4/16/4 Low 'E' & Low Iron glazing, Georgian where requested will be plant-on bar. Energy BFRc "A" rated and CE mark compliant as standard. Furnished window frames over 926mm wide and/or with a central vertical Georgian bar will be fitted with 2 cam catches and keeps for security and balance. PAS24/SBD BS7950 as standard. All sizes to be overall manufacture sizes and include cills and packers.
All windows viewed externally.